

MAESTRO®

52 - 80 - 100



 **IEMCA**

MAESTRO[®]

PERFECTION IS AN ATTITUDE

The MAESTRO[®] is a range of automatic bar feeders for bars from 10 to 100 mm for fixed headstock lathes. Ideal for those who require high performance and the utmost flexibility.



 **IEMCA**

A HISTORY OF SUCCESS

People, Skills, Innovations and Investments have made IEMCA the Worldwide LEADER

1966

Model A

The **first IEMCA bar feeder**, model A, is officially presented at Milan's Trade Show.



1973

Model T

First bar feeder in the world equipped with **multi-rack and bundle magazines**, for 5 times greater production autonomy.



1983

TAL

First bar feeder in the world equipped with **lubrication** inside the guide channel.



1994

SIR

First integral bar feeder for multi-spindle lathes equipped with **guide channels of variable diameter**, thanks to the use of "sprockets" (IEMCA patent).



2007

ELITE

Bar feeder for small diameter bars destined to become **the benchmark for micromechanics**.



1971

Model CS

First bar feeder for sliding headstock able to machine **bars of 0.8 mm diameter**.



1979

PRA

First bar feeder in the world for multi-spindle lathes equipped with a revolutionary patent: the "double bar pusher" or "**pre-feeding**".



1991

BOSS

First bar feeder with full **electronic control** that redefines market standards.



1998

MASTER

Bar feeder for machining **bars up to 80 mm diameter**.



2009

MASTER HF

Hyper-Flexible technology for machining bars between 15 and 80 mm diameter without changing the guide channel.





1961
FOUNDING



4
PRODUCTION PLANTS



550
EMPLOYEES



+150.000
INSTALLATIONS



90
COUNTRIES

2013

BOSS HD SUPERFAST

The SUPERFAST platform reduces bar changeover time up to **37%** and cuts the headstock idle times to **zero**.



2017

SIR HEAVY DUTY

The perfect combination of: machine life cycle cost minimization, extreme flexibility and productivity maximization.



2018

MAESTRO® 80

Automatic bar feeder for **10 to 80 mm** bars for lathes with fixed headstock, to achieve very high performance and the utmost flexibility.



2020

NEXT 42 SLIDING

A machine unlike any other: the first multi-spindle bar feeder with sliding headstock, made to work alongside the DMG MORI MULTISPRINT multi-spindle lathes.



2022

BLUE LINE 100

The new IEMCA high-pressure system for managing fluids with different levels of dirt, perfectly integrated with the ELITE and BOSS bar feeders.



2016

INDUSTRY 4.0

IEMCA bar feeders are the only ones in the world to provide Industry 4.0 technology: warning messages in case of alarm, telecontrol, teleservice, remote connection with other systems, etc.



2018

ELITE ZERO

The first bar feeder in the world for micromechanics, able to feed **0.3 mm** bars.



2018

UNIQA 42 HIGH PERFORMANCE

The machine tool for **preparing bars** with a diameter of **12 – 42 mm**.



2021

MAESTRO® 52

Automatic bar feeder for bars from **10 to 51 mm** for fixed headstock lathes, to achieve very high performance and the utmost flexibility.

CONTENTS

Constant investments in research	06
The flexible solution	08
ABACOS	10
Productivity maximization	12
A magazine for every need	14
Closer than ever before!	16
Cleanliness and silent operation	18
Industry 4.0 operator interface	20
The customer first	22
The IEMCA service	24
Technical specifications	26
Drawings and layouts	28
References	40
Bucci Industries	46
IEMCA Worldwide	48



CONSTANT INVESTMENTS IN RESEARCH

To always be Pioneers in automation

MAESTRO® feeders are made in the IEMCA plant in Faenza, Emilia Romagna, Italy. It is the largest bar feeder plant in the world with an available surface area of more than 25,000 sq.m. More than 200 people work in this location everyday to develop new innovative technologies.

IEMCA has always been working to develop innovative solutions for the end users and to improve its products in terms of productivity, design, physical and cognitive ergonomics. IEMCA has always been working to develop innovative solutions for the end users and to improve its products in terms of productivity, design, physical and cognitive ergonomics. IEMCA works in cooperation with leading Italian Universities and Research Centers and is the technical partner of reference for machine manufacturers who aim to provide the final user with the best technological solutions.



INNOVATIVE SOLUTIONS



50 DESIGNERS




35 ACTIVE PATENTS



RESEARCH CENTERS



RESEARCH CENTERS

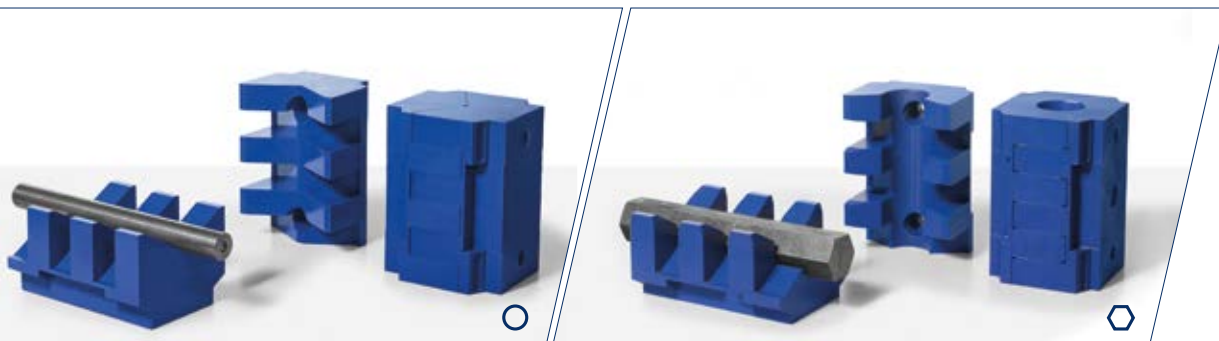

THE FLEXIBLE SOLUTION FOR FIXED HEADSTOCK LATHES

Unrivalled productivity, flexibility and ergonomics

MAESTRO® 52

Ø10 - 51 mm
Space-saving

MAESTRO® 80

Ø10* - 80 mm

MAESTRO® 100

Ø10* - 100 mm



The MAESTRO® bar feeder range is the best possible synthesis of:

- Productivity maximization
 - Great flexibility
 - Physical and cognitive ergonomics
- all with a new, modern DESIGN.

*Depending on the diameter of the guide channel. Please contact IEMCA to correctly define the minimum diameter of workable bar.

ABACOS®



Adaptive BAR COntrOl System

ABACOS is a IEMCA patented system consisting of self-adjusting bushings that adapt to the bar being machined, with no need for the operator to carry out manual adjustments or set the diameter on the HMI.

ABACOS is able to carry out different operations at the same time:

- Guide the bar
 - Dampen the bar vibrations via a pneumatic system
 - Tighten the bar pusher
- all without changing the guide channel.

ABACOS allows to machine shaped bars (e.g. hexagonal), by installing specially sized bushings on the bar diameter. It is fitted with a special lubrication circuit that reduces friction between the self-adjusting bushings and the bar.

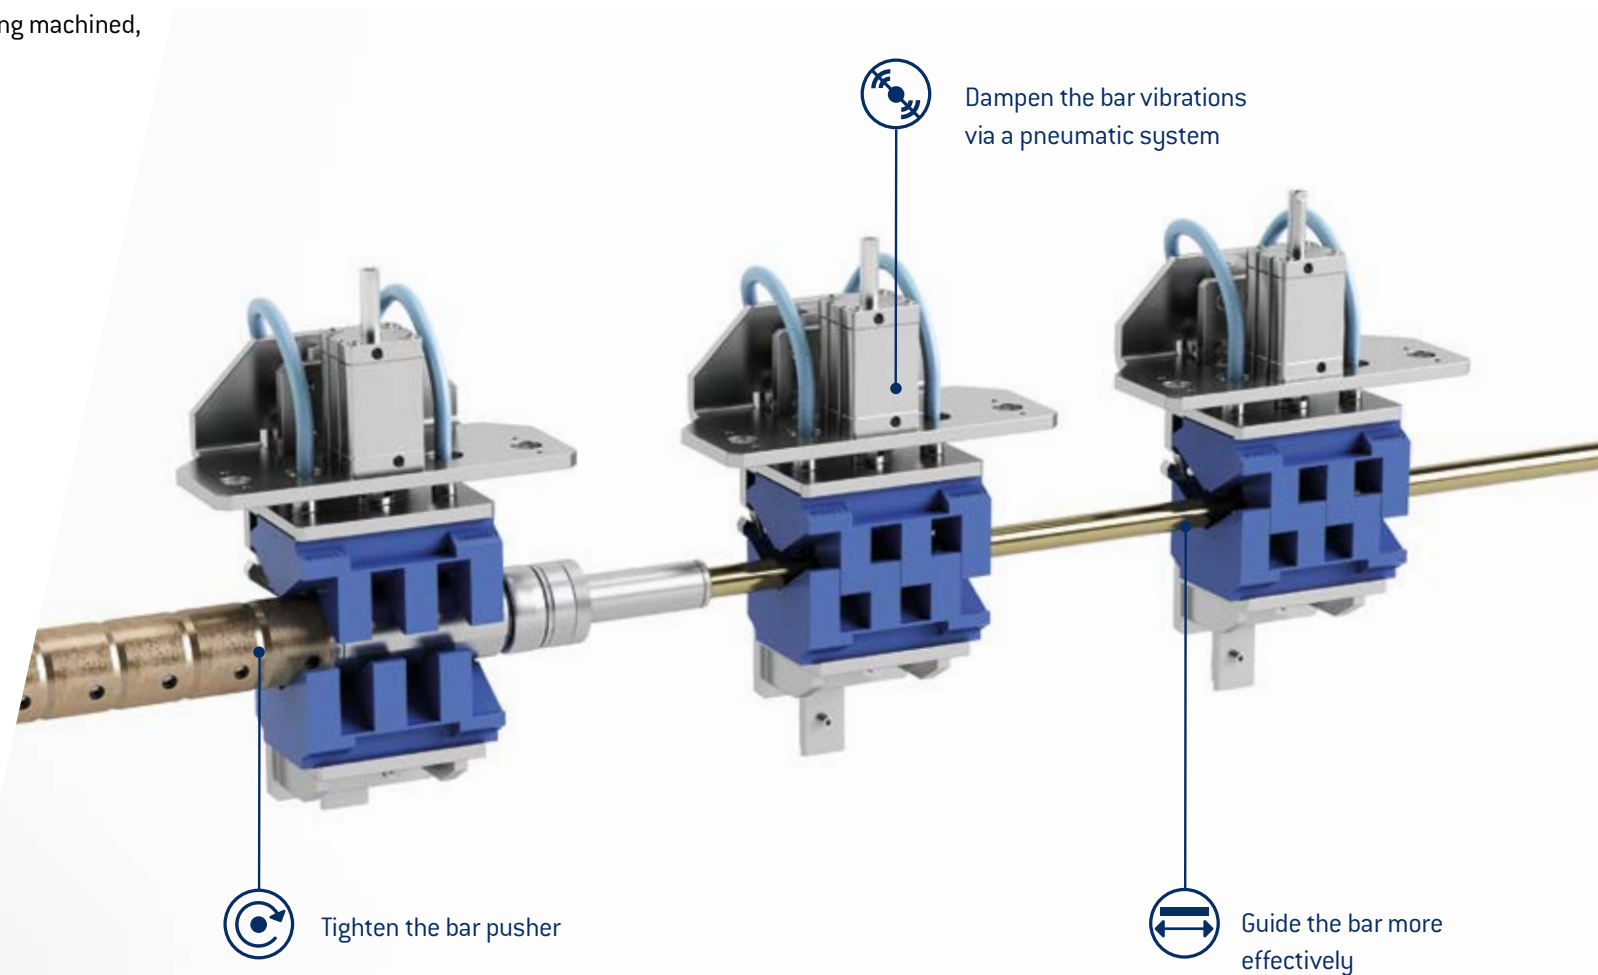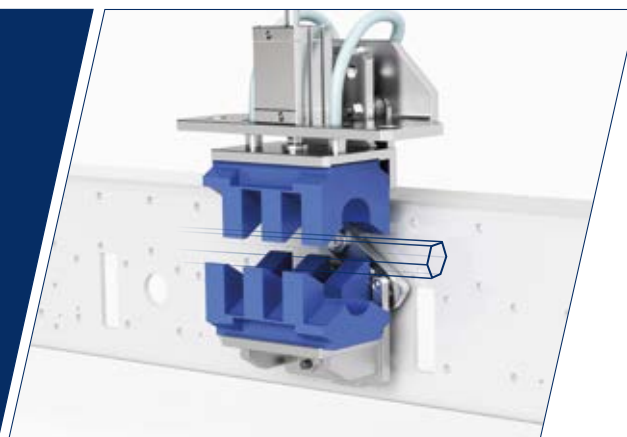

Thanks to the special shape of the ABACOS self-adjusting bushings, the bar is always in contact with the bushing at 4 regularly spaced points along the bar, regardless of the diameter.

PRODUCTIVITY MAXIMIZATION

Get the best from your lathe by choosing IEMCA

The MAESTRO® bar feeder range sets no limits to your desire for efficiency. It allows to:



Reduce retooling time almost to zero



Minimize bar change time to 31 seconds*



Reach the maximum speed allowed by your lathe with every configuration

To change the diameter of the bar to machine, simply set the new diameter on the operator panel and the bar magazine will self-adjust automatically.

MAESTRO® has been conceived and designed in cooperation with CREE certified ergonomists to be at the service of the operator, in compliance with international physical and cognitive ergonomic standards. Ergonomics are now combined with a new modern design.

* Data referred to real situations.



A MAGAZINE FOR EVERY NEED

Single-rack, UP and Open Access Bundle

Single-rack Magazine

- Equipped with an auxiliary bar loading system
- Autonomy: 290 to 330 mm of useful surface

UP Magazine

- Can be loaded manually, with a IEMCA trolley, a forklift, a transpallet or a bridge crane
- Autonomy: 500 mm of useful surface (extendable up to 790 mm)

Open Access Bundle Magazine (OAB)

- Can be loaded with a IEMCA trolley, a forklift, a transpallet or a bridge crane
- Autonomy: 2,500 kg



SINGLE-RACK MAGAZINE
290 to 330 mm of useful surface



UP MAGAZINE
500 mm of useful surface (extendable up to 790 mm)

OAB MAGAZINE
2,500 kg

CLOSER THAN EVER BEFORE!

Minimum installation distance

MAESTRO® is the bar feeder with the shortest installation distance. Thanks to the ABACOS system, it is possible to use short bar pushers thus reducing the installation distance between bar feeder and lathe.

AXIAL SHIFTING

Axial shifting* is the optimal response to operator needs.



FAST

The operator just needs to operate a lever to control the shifting with no need for tools.



COMPACT

No obstacles on the floor.



ERGONOMIC

The operator starts the shifting while standing near the machine with no need to carry out other operations at floor height.



CLEANLINESS AND SILENT OPERATION

That's what we want for your production areas!

MAESTRO® 80 has been designed to maximize working comfort in your production areas, creating the optimal environment for productivity.

- in 1983 IEMCA was the first to introduce lubrication in the guide channel. We have put our 35 years of experience in lubricant management into this project, with the aim of reducing leaks thanks to a new enlarged tank, a completely closed beam and a splash guard.
- The design of the machine is modern and attractive and was especially conceived by IEMCA to hide the cables inside avoiding to leave them visible on the ground.
- IEMCA has optimized acoustic comfort by reducing the machine noise throughout the work cycle: this has been achieved with careful design of the guards and studies on the guides material.

ACOUSTIC COMFORT

Thanks to the special attention put into the design of the guards and in-depth studies on the material from which the guides are made, IEMCA has reduced the noise emission levels of the machine during the work cycle.



*Optional on MAESTRO® 52.

The cables are hidden inside the feeder to keep them out of sight and off the ground.



The new tool box* can be used by the operator to conveniently store IEMCA accessories.

A new larger tank, a completely closed beam and a splash guard reduce oil leakage

INDUSTRY 4.0 OPERATOR INTERFACE

The future is now

The 7" **operator interface** has special functions that make the machine extremely easy and intuitive to use. The operator can view in real time the operation of the ABACOS bushings throughout the work cycle. The "one touch" feature facilitates the operator: it is in fact possible to carry out multiple operations with just one touch. Work programs can be stored and easily recalled if needed. The bar feeder keypad can be re-installed on the lathe control panel.

In January 2017 IEMCA is the first company in the world producing bar feeders to deliver Industry 4.0 machines.

IEMCA devices are able to acquire and share data with other machines and production systems of the customer user, contributing to the constant improvement of production processes.



Send e-mails and texts in case of alarm on the machine



Telecontrol and remote control



Global teleassistance on all machine equipment



Backup and restore Machine Parameters




Telecontrol via OPC UA Clients



Telecontrol with camera



Remote control and Wi-Fi remote control

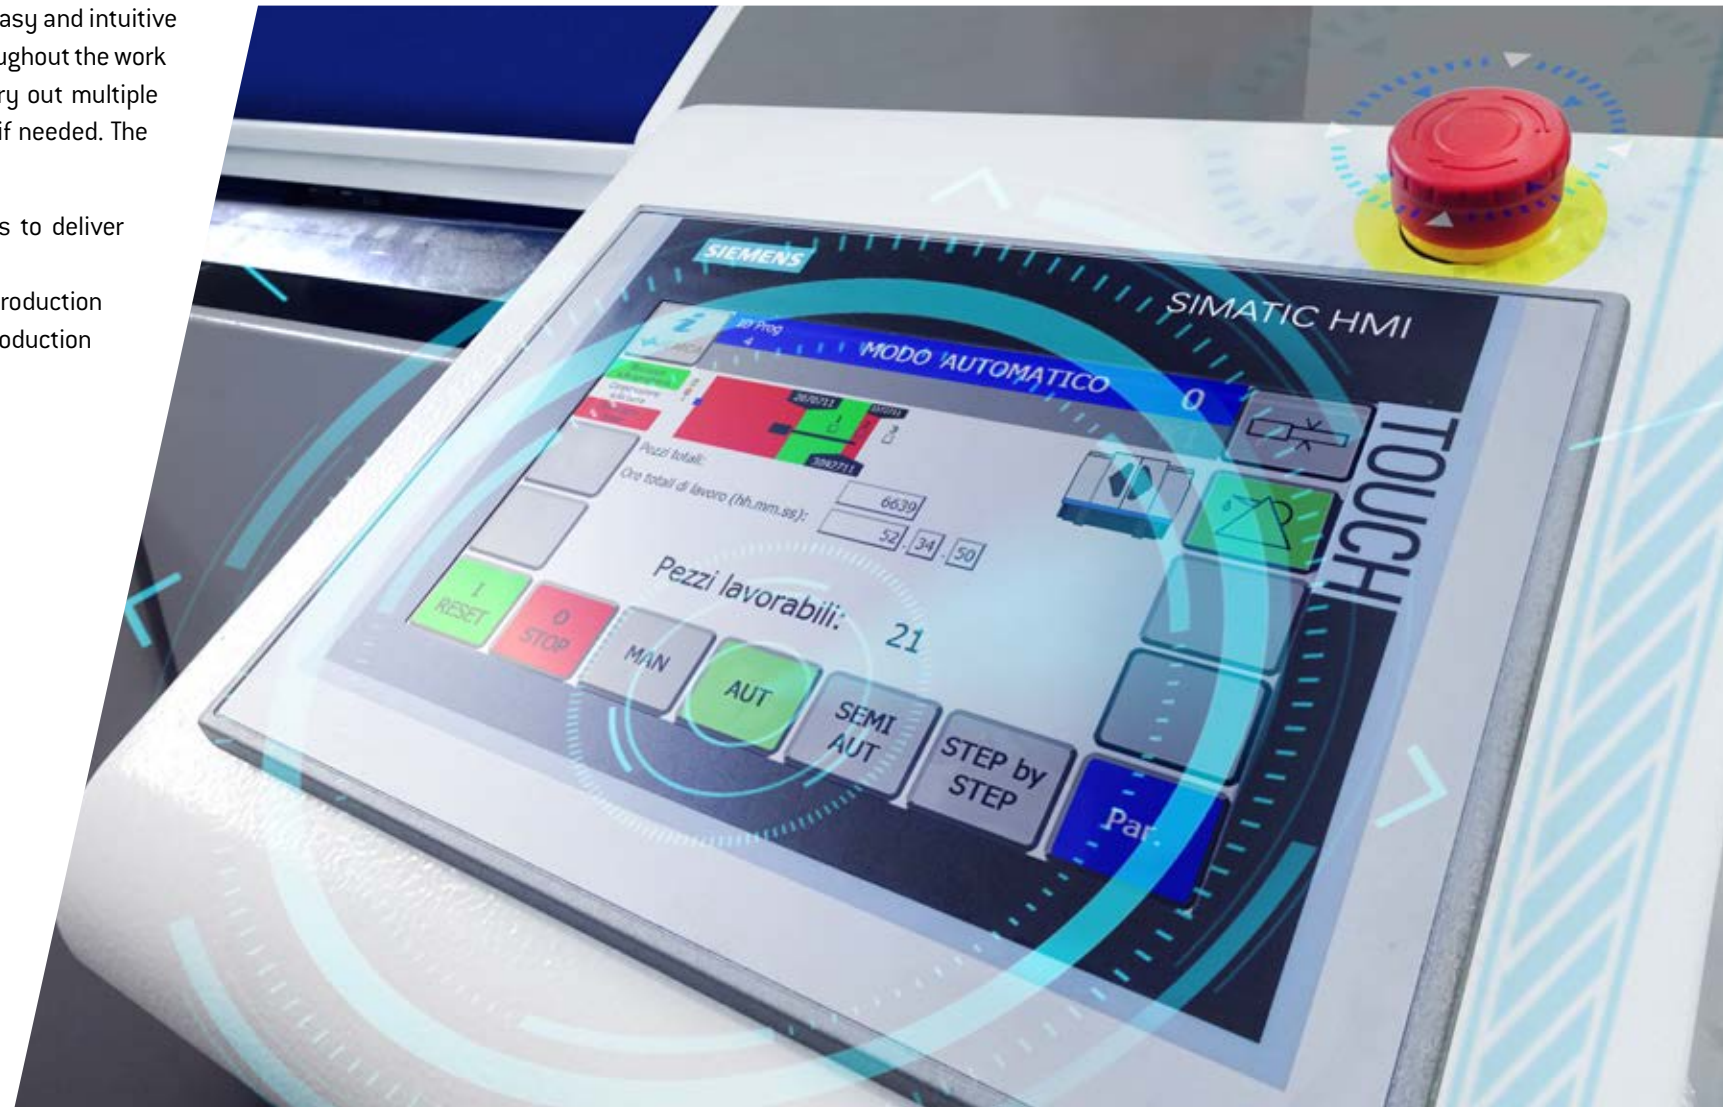

THE CUSTOMER FIRST

A worldwide network at your service



ITALY

IEMCA a BUCCI AUTOMATIONS
S.p.A. Division
Via Granarolo 167
48018 Faenza (RA)
Italy
Ph. +39 0546 698000
iemca.it@bucci-industries.com
www.iemca.com

KEY:

-  Headquarters
-  Plant
-  Sales and Support Branch
-  Dealer
-  Agent
-  Support

 BELGIUM BUCCI INDUSTRIES BENELUX S.r.l. 53/4, Route de Saussin 5190 Jemeppe-sur-Sambre Belgium Ph. +32 475 91 45 44 iemca.be@bucci-industries.com	 BRASIL BUCCI INDUSTRIES BRASIL LTDA Rua Arnaldo Roque Brisque, 104 13285-328 Vista Alegre - Vinhedo, SP Brazil Ph. +55 19 3515 7220 iemca.br@bucci-industries.com	 CHINA BUCCI INDUSTRIES CHINA BI-TECH (Suzhou) Co., Ltd. No. 106 Wufang Road, Wujiang District Suzhou City, Jiangsu Province PRC Ph. +86 512 8155 6988 iemca.cn@bucci-industries.com	 CZECH REPUBLIC PODAJEX LTD ING. PETR KALETA Vendryně, 1000 73994 Vendryně Czech Republic Ph. +420 608 927 130 petr.kaleta@podajex.com www.podajex.com	 CZECH REPUBLIC SFS PRO S.R.O. Tečovská, 911 763 02 Malenovice Zlín Czech Republic Ph. Rostislav Sypták: +420 702 107 748 Milan Dosedla: +420 776 144 792 md@sfspro.cz www.sfspro.cz	 FRANCE BUCCI INDUSTRIES FRANCE SAS 145, Rue Louis Armand Z.I. Les Grands Prés 74300 Cluses France Ph. +33 (0)4 50 89 69 60 iemca.fr@bucci-industries.com
 GERMANY BUCCI INDUSTRIES DEUTSCHLAND GmbH Stammheimer Str. 10 70806 Kornwestheim Germany Ph. +49 7154 83 70 70 0 iemca.de@bucci-industries.com	 GERMANY BUCCI INDUSTRIES DEUTSCHLAND GmbH Königsberger Str. 10 58511 Lüdenscheid Germany Ph. +49 2351 80521 iemca.de@bucci-industries.com	 GERMANY STIMPEL WERKZEUGMASCHINEN Stüttinghauser Ringstr. 39 58515 Lüdenscheid Germany Ph. +49 2351 78183 info@stimpel-werkzeugmaschinen.de www.stimpel-werkzeugmaschinen.de	 GERMANY REIMO LOBERS GMBH & CO. KG Rebgartenweg 5/1 79576 Weil am Rhein Germany Ph. +49 7621 161460 mail@lobers.de www.lobers.de	 INDIA BUCCI INDUSTRIES INDIA PRIVATE LTD 411, DLF Tower B, Jasola District Centre 110076 New Delhi India Ph. +91 11 41525077 iemca.in@bucci-industries.com	 JAPAN BUCCI INDUSTRIES JAPAN Co. Ltd. 6-10-1 Kamoi, Midori-Ku 226-0003 Yokohama Japan Ph. +81 45 931 5096 iemca.jp@bucci-industries.com
 POLAND PODAJEX LTD ING. PETR KALETA Lukowa, 15/3 43-300 Bielko-Biala Poland Ph. +420 608 927 130 petr.kaleta@podajex.com www.podajex.com	 POLAND SPI SP. Z O.O. ul. Kaszubska 1 75-036 Koszalin Poland Ph. +48 518 854 292 biuro@spispzoo.pl www.spispzoo.pl	 ROMANIA PODAJEX LTD ING. PETR KALETA Str. Crişan, 14 415 100 Aleşd Romania Ph. +420 608 927 130 petr.kaleta@podajex.com www.podajex.com	 SOUTH KOREA BUCCI INDUSTRIES KOREA LIMITED #131-132, 337, Bupyeong-daero, Bupyeong-gu, Incheon Republic of Korea Ph. +82 32 293 8341 iemca.kr@bucci-industries.com	 SPAIN MANTEIN Poligono Olaso, C/ Olasope, 3 Nave 5 20870 Elgoibar Guipúzcoa Spain Ph. +34 943 25 79 73 mantein@mantein.com www.mantein.com	 SWEDEN BUCCI INDUSTRIES NORDIC AB Metallgatan 2-4 441 32 Alingsås Sweden Ph. +46 322 66 87 20 iemca.se@bucci-industries.com
 SWITZERLAND BUCCI INDUSTRIES SWISS SA Route du Grandval 3 CH-2744 Belprahon Switzerland Ph. +41 (0)32 493 40 54 iemca.ch@bucci-industries.com	 TAIWAN BUCCI INDUSTRIES TAIWAN GIULIANI IEMCA MACHINERY CO., LTD No. 297, Dongxing Rd., Dali Dist., Taichung City 412016 Taiwan Ph. +886 4 24066970 iemca.tw@bucci-industries.com	 TURKEY SINTEK MÜHENDİSLİK Tarabya Mah. Yumak Sok, 3A/1 Sarıyer, Istanbul Turkey Ph. +90 (0212) 299 61 84 85 sinan.onurlu@sintekmuhendislik.com www.sintekmuhendislik.com	 UK BUCCI INDUSTRIES UK LIMITED The Manor House, The Grange Bishops Cleeve, Cheltenham Gloucestershire GL52 8YQ United Kingdom iemca.uk@bucci-industries.com	 USA BUCCI INDUSTRIES USA, Inc. 9332 Forsyth Park Drive Charlotte, NC 28273 USA Ph. +1 (704) 583 8341 iemca.us@bucci-industries.com	

IEMCA SUPPORT WILL HELP KEEP YOUR MACHINE OPERATING AT 100%

WORLDWIDE SUPPORT

IEMCA customers can count on the support of more than 150 technicians for prompt intervention on site, phone support and spare parts.


Preventive maintenance: IEMCA technical experts support the end user keeping the bar feeder in healthy operating condition for years.

Recommended spare parts: the end user can contact the IEMCA network and get convenient and original spare parts packages.



TECHNICAL SPECIFICATIONS*

	MAESTRO® 52	MAESTRO® 80	MAESTRO® 100
 ROUND BARS	10 - 51 mm	10** - 80 mm	10** - 100 mm
 HEXAGONAL BARS	9 - 43 mm	10** - 69 mm	10** - 86 mm
 SQUARE BARS	8 - 36 mm	10** - 56 mm	10** - 70 mm
 MP MAGAZINE	297 ÷ 319 mm	290 ÷ 330 mm	290 ÷ 330 mm
 UP MAGAZINE	500 mm of useful surface (extendable up to 790 mm)	500 mm of useful surface (extendable up to 790 mm)	500 mm of useful surface (extendable up to 790 mm)
 OAB MAGAZINE	2500 kg	2500 kg	2500 kg
 NUMBER OF SPINDLES	1	1	1
 BAR LENGTH	Ver. 32 - 3200 mm Ver. 37 - 3700 mm Ver. 42 - 4200 mm	Ver. 32 - 3200 mm Ver. 37 - 3700 mm Ver. 42 - 4200 mm	Ver. 32 - 3200 mm Ver. 37 - 3700 mm Ver. 42 - 4200 mm
 MAX BAR WEIGHT	100 kg	180 kg	180 kg
 BAR CHANGEOVER TIME	Ver. 32 - 31 s Ver. 37 - 33 s Ver. 42 - 35 s	Ver. 32 - 31 s Ver. 37 - 33 s Ver. 42 - 35 s	Ver. 32 - 31 s Ver. 37 - 33 s Ver. 42 - 35 s

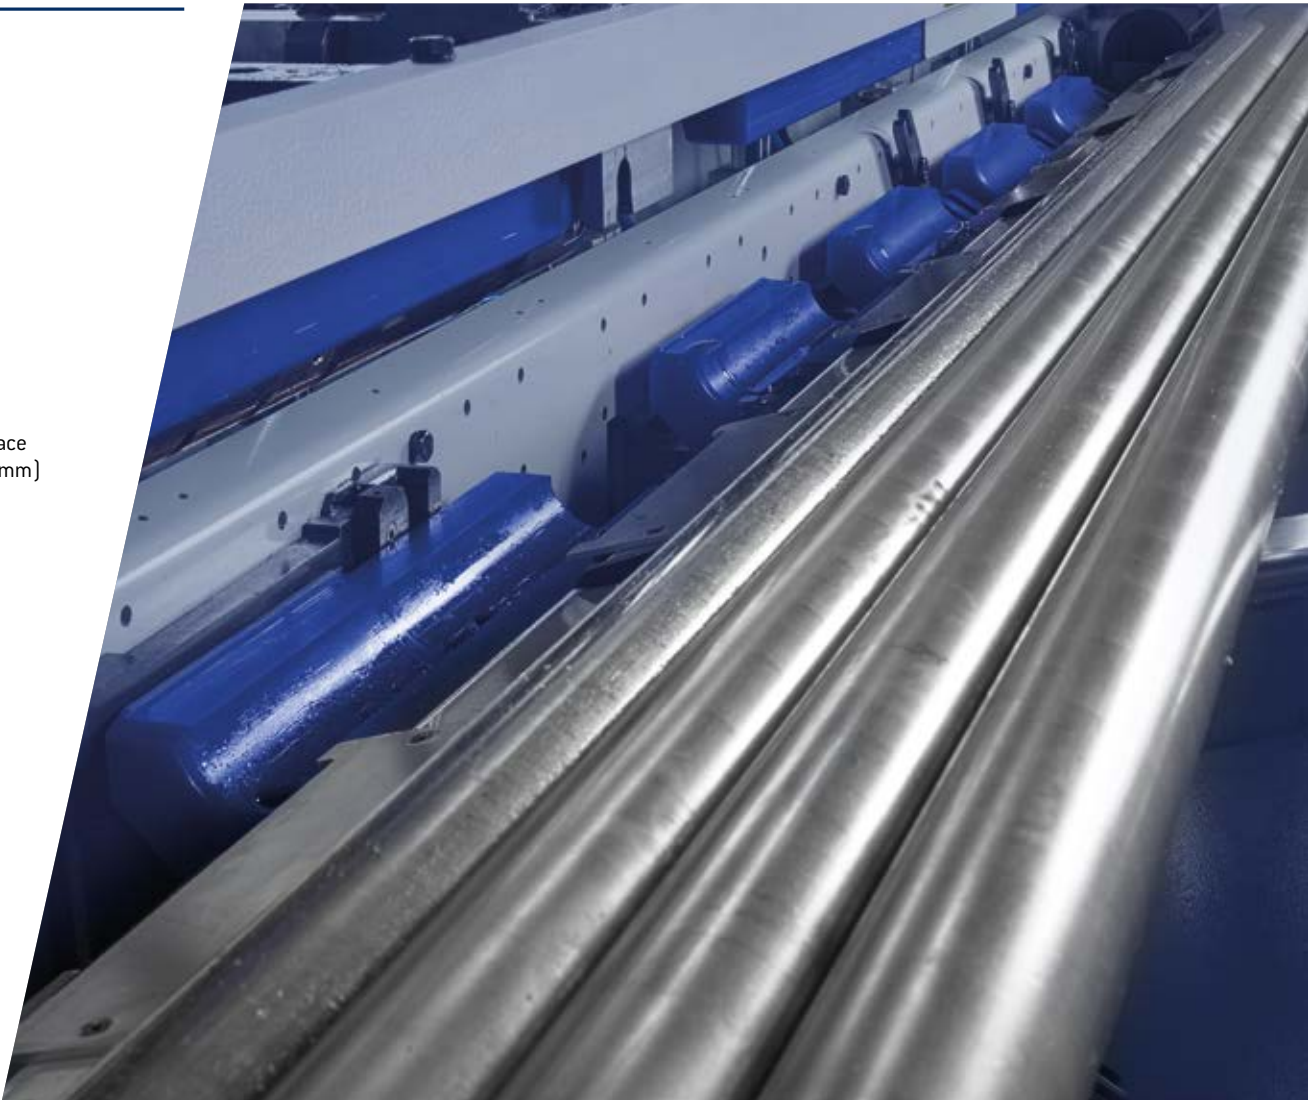




*See the technical specifications table in the following pages for the specific values for each bar feeder model and magazine type.
**Depending on the diameter of the guide channel. Please contact IEMCA to correctly define the minimum diameter of workable bar.

MAESTRO® 52



Technical specifications	Single-rack magazine (MP)
Round bar dimensions	10 - 51 mm
Hexagonal bars dimensions (key socket)	9 - 43 mm
Square bars side	8 - 36 mm
Minimum bar length	1000 mm
Maximum bar length	Ver. 32 - 3200 mm · Ver. 37 - 3700 mm · Ver. 42 - 4200 mm
MP magazine capacity	297 - 319 mm (e.g. 29 bars measuring Ø10 mm, 6 bars measuring Ø49 mm)
Axial shifting	700 mm (optional)
Max bar weight	100 kg
Max remnant length	400 mm
Min remnant length	110 mm
Bar changeover time*	Ver. 32 - 31 s · Ver. 37 - 33 s · Ver. 42 - 35 s
Operating voltage	230 / 400 Volt
Operating voltage	50 / 60 Hz
Control voltage	24 Volt A.C. - 24 Volt D.C.
Installed power	1,5 kW
Oil quantity	110 L
Air pressure	Min. 6 bar
Air consumption	35 NI/bar change
Bar feeder weight	Ver. 32 - 1400 kg · Ver. 37 - 1470 kg · Ver. 42 - 1550 kg

*The table contains purely indicative data. Different factors such as length and material of the barstock, and some of the parameter settings by the operator, can affect the time significantly.

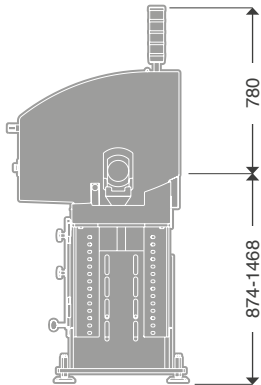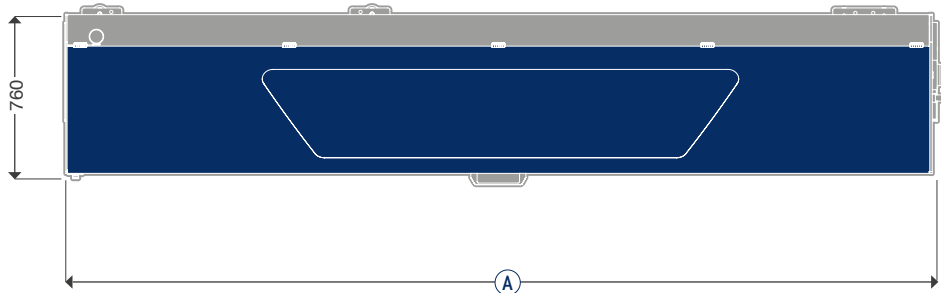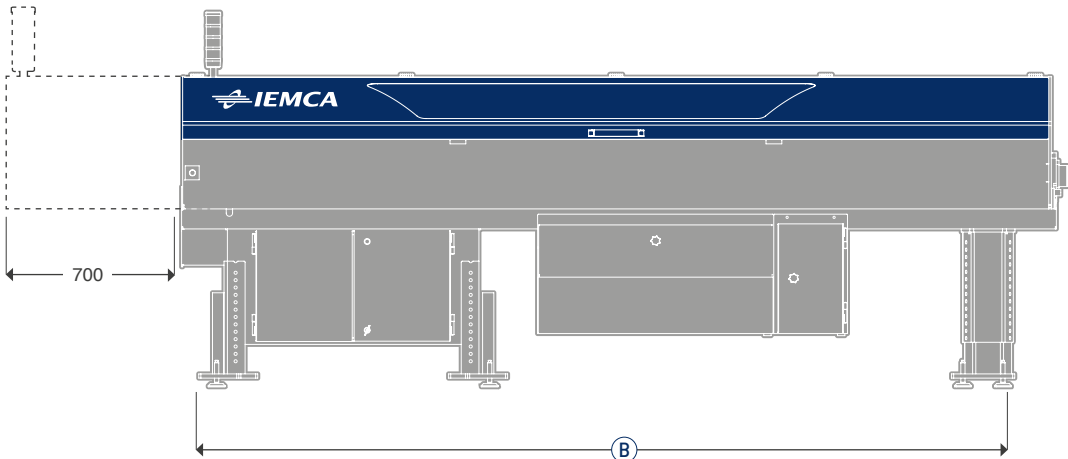

MAESTRO® 52 - Single-rack magazine (MP)			
	32	37	42
A	4125	4625	5125
B	3880	4380	4880

MAESTRO® 52




Technical specifications

UP Magazine

Round bar dimensions	10 - 51 mm
Hexagonal bars dimensions (key socket)	9 - 43 mm
Square bars side	8 - 36 mm
Minimum bar length	Ver. 32 - 2000 mm · Ver. 37 - 2500 mm · Ver. 42 - 3000 mm
Maximum bar length	Ver. 32 - 3200 mm · Ver. 37 - 3700 mm · Ver. 42 - 4200 mm
UP magazine capacity	500 mm of useful surface (extendable up to 790 mm)
Axial shifting	700 mm (optional)
Max bar weight	100 kg
Max remnant length	400 mm
Min remnant length	110 mm
Bar changeover time*	Ver. 32 - 31 s · Ver. 37 - 33 s · Ver. 42 - 35 s
Operating voltage	230 / 400 Volt
Operating voltage	50 / 60 Hz
Control voltage	24 Volt A.C. - 24 Volt D.C.
Installed power	2 kW
Oil quantity	110 L
Air pressure	Min. 6 bar
Air consumption	35 NI/bar change
Bar feeder weight	Ver. 32 - 1800 kg · Ver. 37 - 1885 kg · Ver. 42 - 1980 kg

*The table contains purely indicative data.
Different factors such as length and material of the barstock, and some of the parameter settings by the operator, can affect the time significantly. Check availability with your IEMCA sales representative.

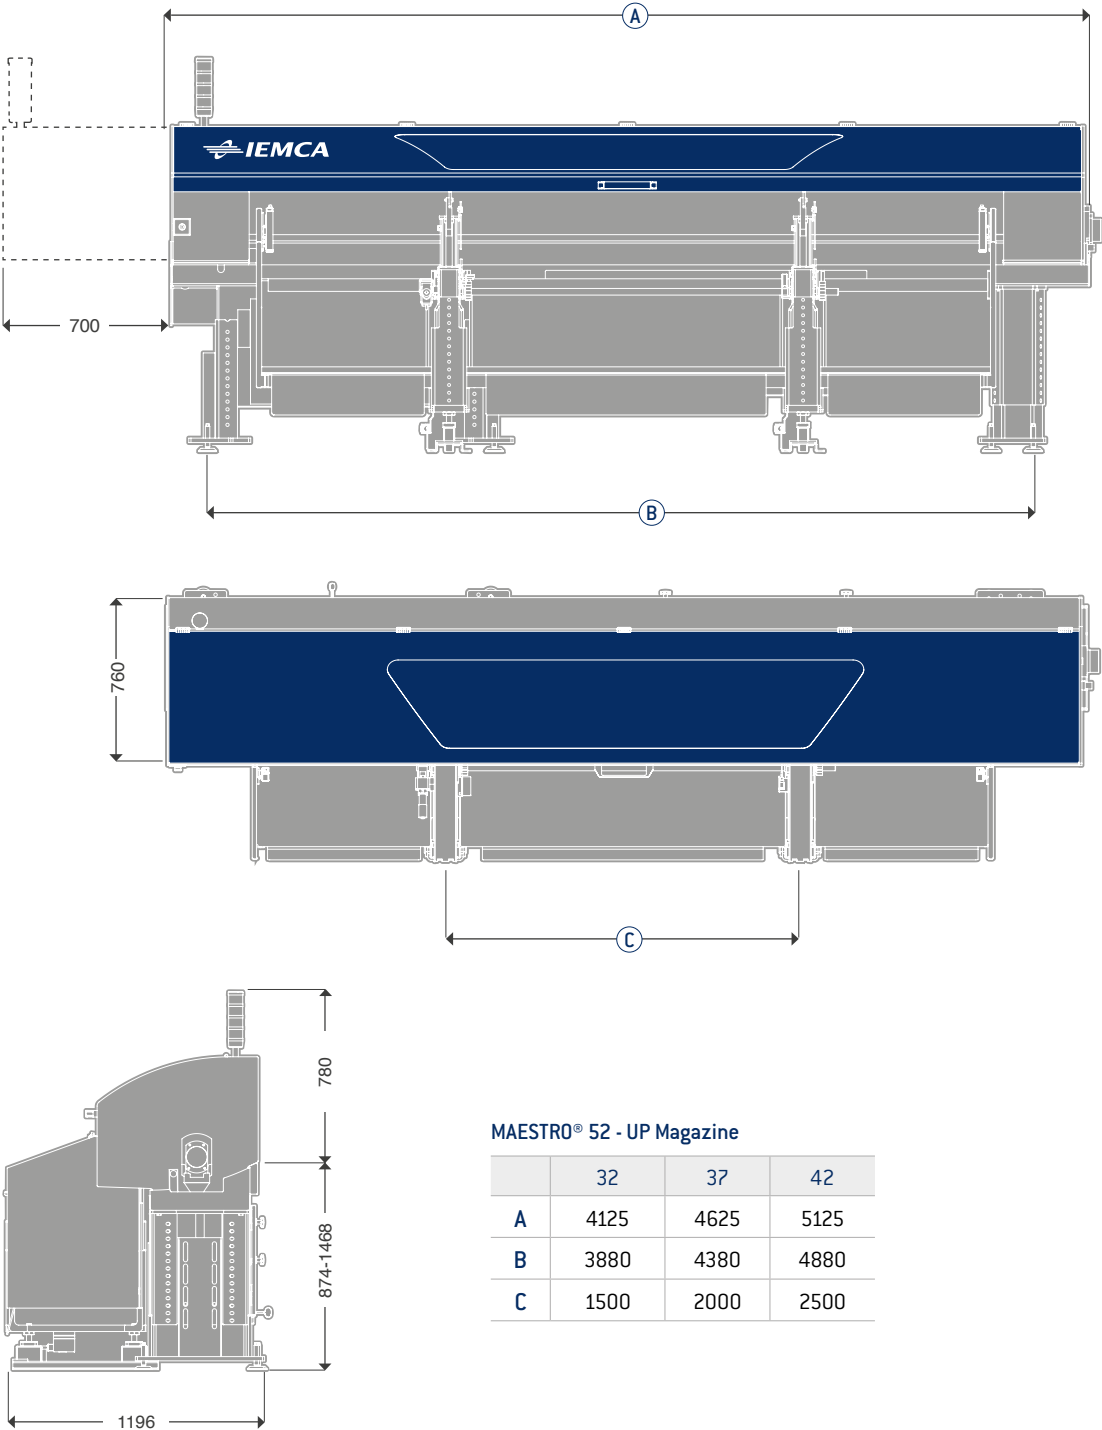

MAESTRO® 52 - UP Magazine

	32	37	42
A	4125	4625	5125
B	3880	4380	4880
C	1500	2000	2500

MAESTRO® 52




OAB Magazine

Technical specifications

Round bar dimensions	15 - 51 mm
Hexagonal bars dimensions (key socket)	15 - 43 mm
Square bars side	15 - 36 mm
Minimum bar length	Ver. 32 - 2000 mm · Ver. 37 - 2500 mm · Ver. 42 - 3000 mm
Maximum bar length	Ver. 32 - 3200 mm · Ver. 37 - 3700 mm · Ver. 42 - 4200 mm
OAB magazine capacity	2.500 kg
Axial shifting	700 mm (optional)
Max bar weight	100 kg
Max remnant length	400 mm
Min remnant length	110 mm
Bar changeover time*	Ver. 32 - 31 s · Ver. 37 - 33 s · Ver. 42 - 35 s
Operating voltage	230 / 400 Volt
Operating voltage	50 / 60 Hz
Control voltage	24 Volt A.C. - 24 Volt D.C.
Installed power	3 kW
Oil quantity	110 L
Air pressure	Min. 6 bar
Air consumption	47 NI/bar change
Bar feeder weight	Ver. 32 - 1960 kg · Ver. 37 - 2065 kg · Ver. 42 - 2180 kg

*The table contains purely indicative data.
Different factors such as length and material of the barstock, and some of the parameter settings by the operator, can affect the time significantly. Check availability with your IEMCA sales representative.

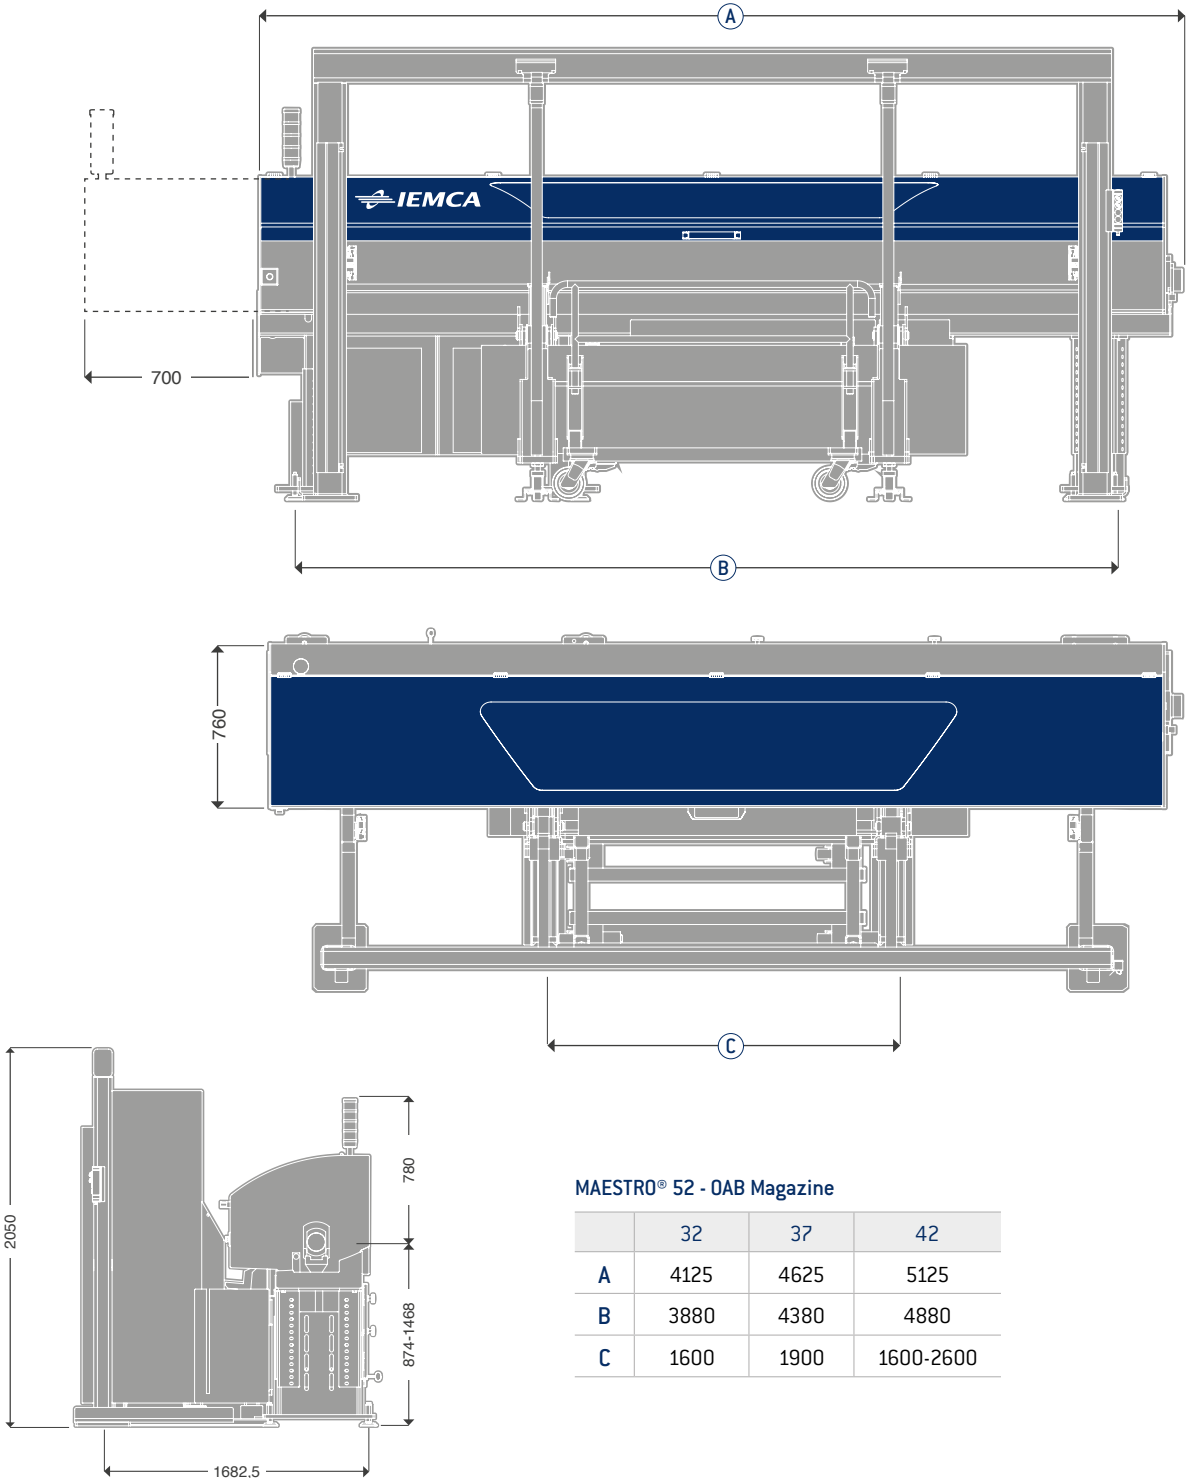


MAESTRO® 52 - OAB Magazine

	32	37	42
A	4125	4625	5125
B	3880	4380	4880
C	1600	1900	1600-2600

MAESTRO® 80 · 100

Technical specifications	 MAESTRO® 80 MP	 MAESTRO® 100 MP
Round bar dimensions	10* - 80 mm	10* - 100 mm
Hexagonal bars dimensions (key socket)	10* - 69 mm	10* - 86 mm
Square bars side	10* - 56 mm	10* - 70 mm
Minimum bar length	1100 mm	
Maximum bar length	Ver. 32 - 3200 mm · Ver. 37 - 3700 mm · Ver. 42 - 4200 mm	
MP magazine capacity	290 - 330 mm (e.g. 29 bars measuring Ø10 mm, 4 bars measuring Ø80 mm)	290 - 330 mm (e.g. 29 bars measuring Ø10 mm, 3 bars measuring Ø100 mm)
Axial shifting	800 mm	
Max bar weight	180 kg	
Max remnant length	Ø10 ÷ 65 mm = 400 mm Ø66 ÷ 80 mm = 250 mm	Ø10 ÷ 65 mm = 400 mm Ø66 ÷ 100 mm = 250 mm
Min remnant length	110 mm	
Bar changeover time*	Ver. 32 - 31 s · Ver. 37 - 33 s · Ver. 42 - 35 s	
Operating voltage	230 / 400 Volt	
Operating voltage	50 / 60 Hz	
Control voltage	24 Volt A.C. - 24 Volt D.C.	
Installed power	1,5 kW	
Oil quantity	115 L	
Air pressure	Min. 6 bar	
Air consumption	67 NI/bar change	
Bar feeder weight	Ver. 32 - 1880 kg · Ver. 37 - 1950 kg · Ver. 42 - 2050 kg	

*Depending on the diameter of the guide channel. Please contact IEMCA to correctly define the minimum diameter of workable bar.
**The table contains purely indicative data. Different factors such as length and material of the barstock, and some of the parameter settings by the operator, can affect the time significantly.

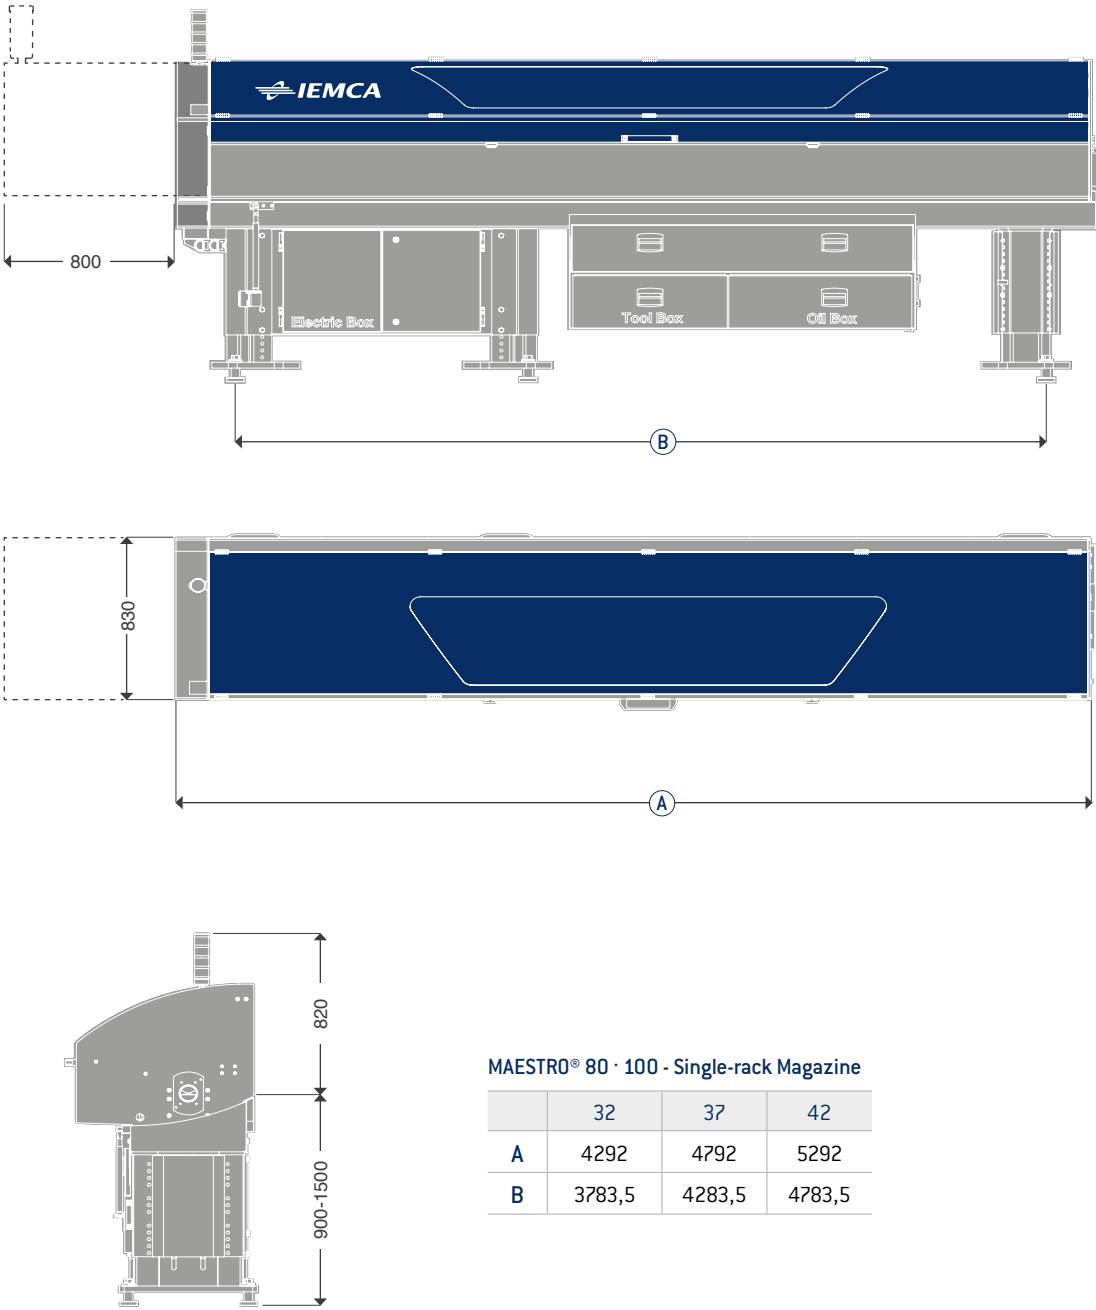


MAESTRO® 80 · 100 - Single-rack Magazine			
	32	37	42
A	4292	4792	5292
B	3783,5	4283,5	4783,5

MAESTRO® 80 · 100

Technical specifications	 MAESTRO® 80 UP	 MAESTRO® 100 UP
Round bar dimensions	10* - 80 mm	10* - 100 mm
Hexagonal bars dimensions (key socket)	10* - 69 mm	10* - 86 mm
Square bars side	10* - 56 mm	10* - 70 mm
Minimum bar length	Ver. 32 - 2000 mm · Ver. 37 - 2500 mm · Ver. 42 - 3000 mm	
Maximum bar length	Ver. 32 - 3200 mm · Ver. 37 - 3700 mm · Ver. 42 - 4200 mm	
UP magazine capacity	500 mm of useful surface (extendable up to 790 mm)	
Axial shifting	800 mm	
Max bar weight	180 kg	
Max remnant length	Ø10 ÷ 65 mm = 400 mm Ø66 ÷ 80 mm = 250 mm	Ø10 ÷ 65 mm = 400 mm Ø66 ÷ 100 mm = 250 mm
Min remnant length	110 mm	
Bar changeover time*	Ver. 32 - 31 s · Ver. 37 - 33 s · Ver. 42 - 35 s	
Operating voltage	230 / 400 Volt	
Operating voltage	50 / 60 Hz	
Control voltage	24 Volt A.C. - 24 Volt D.C.	
Installed power	2 kW	
Oil quantity	115 L	
Air pressure	Min. 6 bar	
Air consumption	65 NI/bar change	
Bar feeder weight	Ver. 32 - 2280 kg · Ver. 37 - 2365 kg · Ver. 42 - 2480 kg	


*Depending on the diameter of the guide channel. Please contact IEMCA to correctly define the minimum diameter of workable bar.
**The table contains purely indicative data. Different factors such as length and material of the barstock, and some of the parameter settings by the operator, can affect the time significantly.

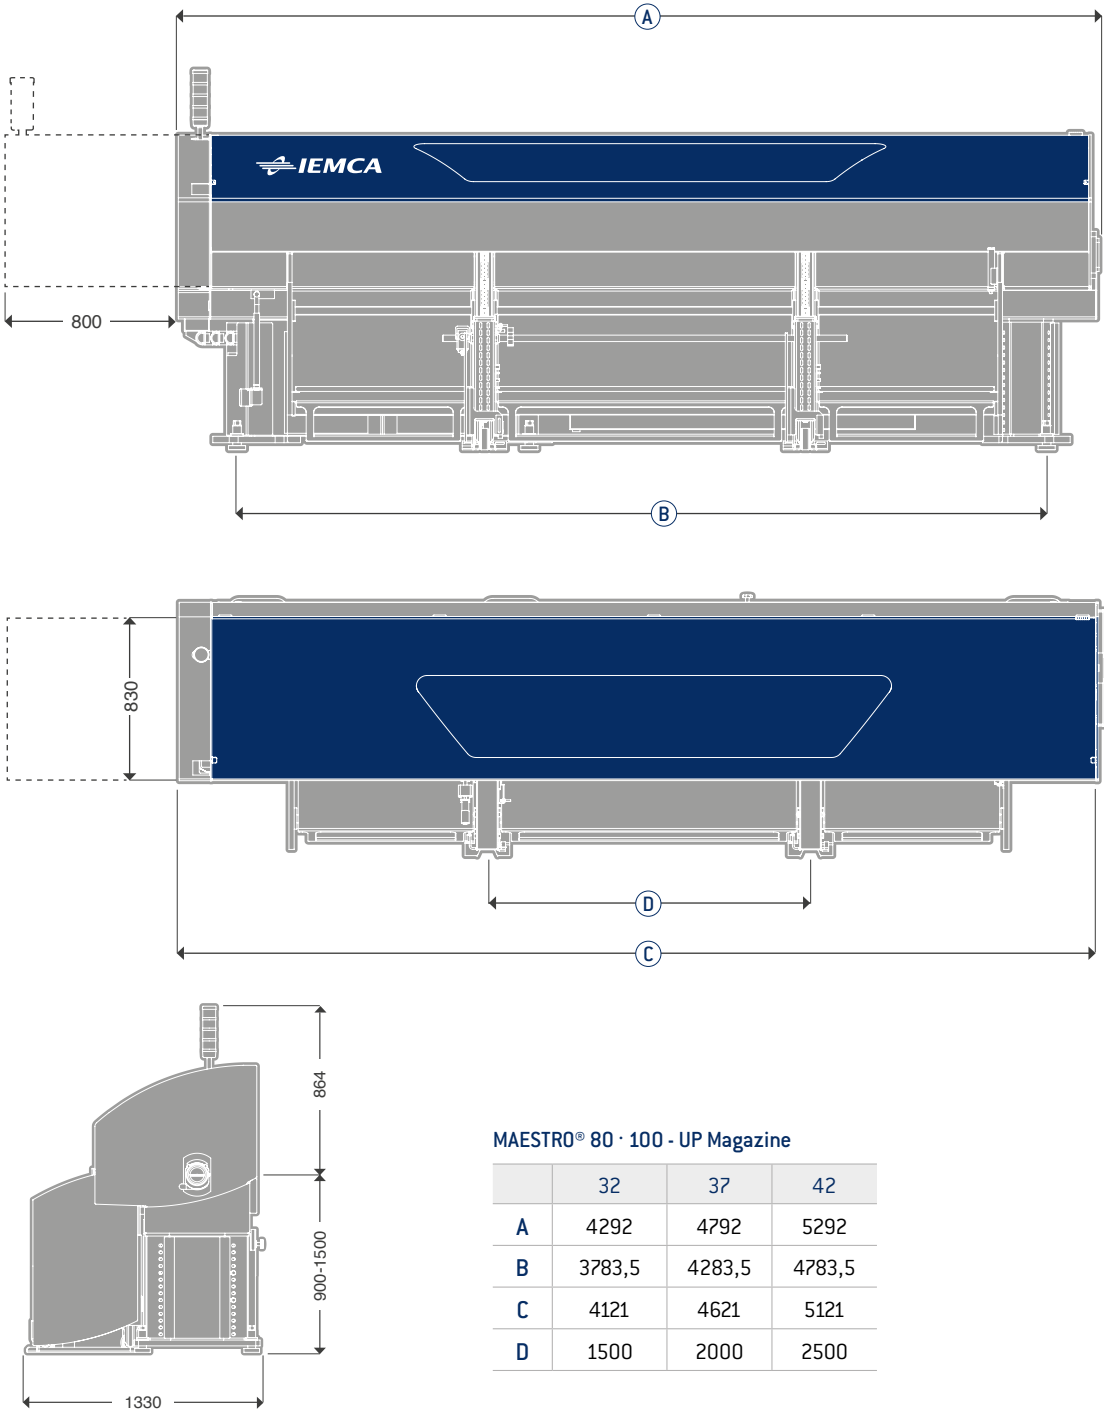

MAESTRO® 80 · 100

Technical specifications		
	MAESTRO® 80 OAB	MAESTRO® 100 OAB
Round bar dimensions	15* - 80 mm	15* - 100 mm
Hexagonal bars dimensions (key socket)	15* - 69 mm	15* - 86 mm
Square bars side	15* - 56 mm	15* - 70 mm
Minimum bar length	Ver. 32 - 2000 mm · Ver. 37 - 2500 mm · Ver. 42 - 3000 mm	
Maximum bar length	Ver. 32 - 3200 mm · Ver. 37 - 3700 mm · Ver. 42 - 4200 mm	
OAB magazine capacity	2500 kg	
Axial shifting	800 mm	
Max bar weight	180 kg	
Max remnant length	Ø15 ÷ 65 mm = 400 mm Ø66 ÷ 80 mm = 250 mm	Ø15 ÷ 65 mm = 400 mm Ø66 ÷ 100 mm = 250 mm
Min remnant length	110 mm	
Bar changeover time*	Ver. 32 - 31 s · Ver. 37 - 33 s · Ver. 42 - 35 s	
Operating voltage	230 / 400 Volt	
Operating voltage	50 / 60 Hz	
Control voltage	24 Volt A.C. - 24 Volt D.C.	
Installed power	3 kW	
Oil quantity	115 L	
Air pressure	Min. 6 bar	
Air consumption	65 NI/bar change	
Bar feeder weight	Ver. 32 - 2440 kg · Ver. 37 - 2545 kg · Ver. 42 - 2680 kg	

*Depending on the diameter of the guide channel. Please contact IEMCA to correctly define the minimum diameter of workable bar.
**The table contains purely indicative data. Different factors such as length and material of the barstock, and some of the parameter settings by the operator, can affect the time significantly.

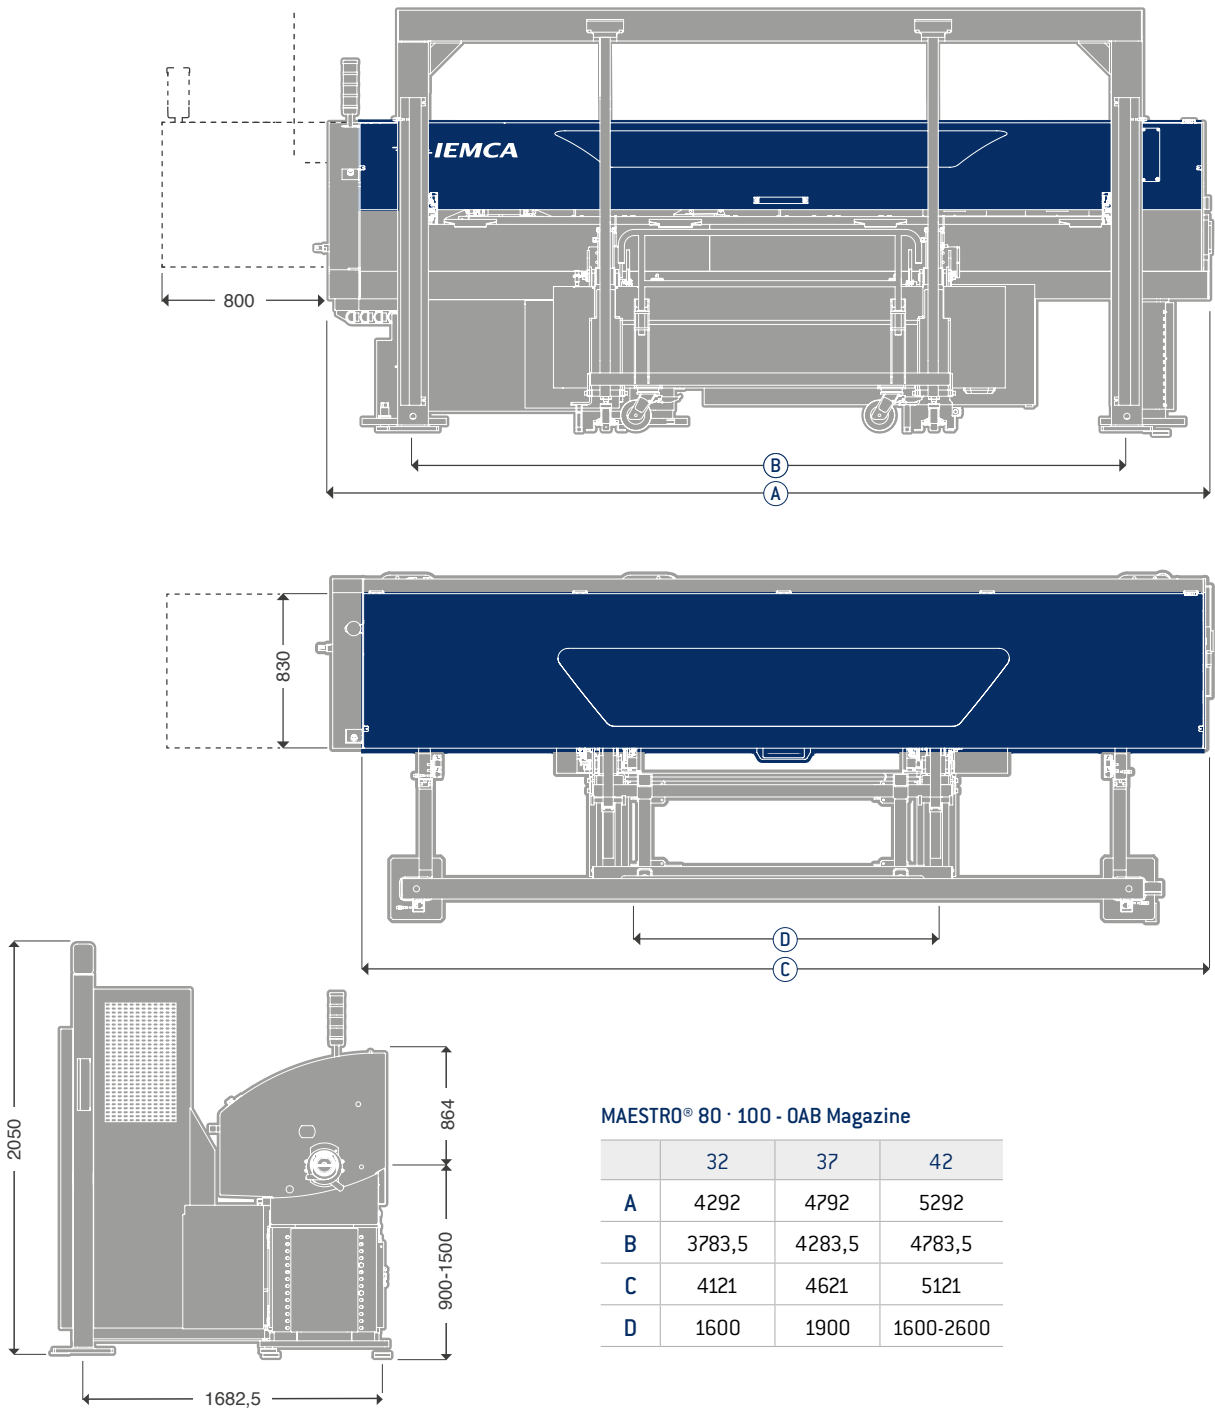

MAESTRO® 80 · 100 - OAB Magazine

	32	37	42
A	4292	4792	5292
B	3783,5	4283,5	4783,5
C	4121	4621	5121
D	1600	1900	1600-2600

REFERENCES



MAESTRO 80 MP with BIGLIA B465 T3 Y3



MAESTRO 80 UP with DMG Mori CLX 450 TC




MAESTRO 80 MP with DMG MORI CTX 2500 / 700

REFERENCES



MAESTRO 80 MP with NAKAMURA-TOME SUPER NJT

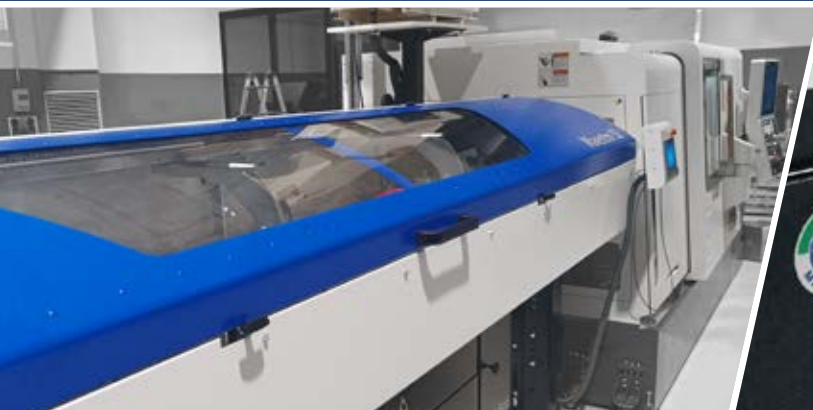


MAESTRO 52 with NAKAMURA-TOME WY-100II



MAESTRO 80 MP with DMG MORI NLX 2500 / 700

REFERENCES

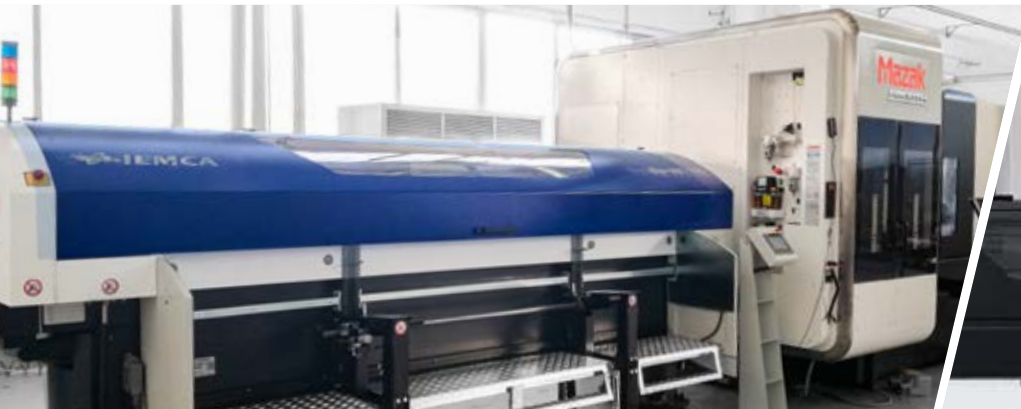

MAESTRO 100 UP with MAZAK INTEGREX i-400S



MAESTRO 80 MP with DOOSAN PUMA TT 1800



MAESTRO 80 MP with MAZAK QT-COMPACT 200MS L

BUCCI INDUSTRIES

People, Passion, Technology!

The BUCCI INDUSTRIES GROUP is worldwide leader in two sectors: in industrial AUTOMATION & ROBOTICS and advanced COMPOSITE MATERIALS.

In the automation industry, Bucci Industries operates with the following brands:

IEMCA: worldwide leader in the design and production of bar feeders (www.iemca.com)

GIULIANI: leader in the industry of high-productivity and high-flexibility machine tools and transfer machines (www.giulianimachines.com)

SINTECO: leader in the field of automation and robotics for assembly applications and in the management of medicine unit doses in hospitals (www.sintecorobotics.com)

VIRE: benchmark for the packaging of hygiene products (www.vire.it)

ZETA: design and production of automatic end-of-line machines for secondary packaging (www.zetamachines.com)

Bucci Industries operates with the brand **BUCCI COMPOSITES** in the design and production of advanced composite materials, primarily carbon fibre (www.bucci-composites.com)

www.bucci-industries.com



WORLDWIDE
LEADER



1.400+
PEOPLE



200+
R&D ENGINEERS




PARTNERSHIPS WITH
UNIVERSITIES AND
RESEARCH CENTRES

+70
YEARS
OF HISTORY



INVESTMENTS TO
CREATE NEW SKILLS



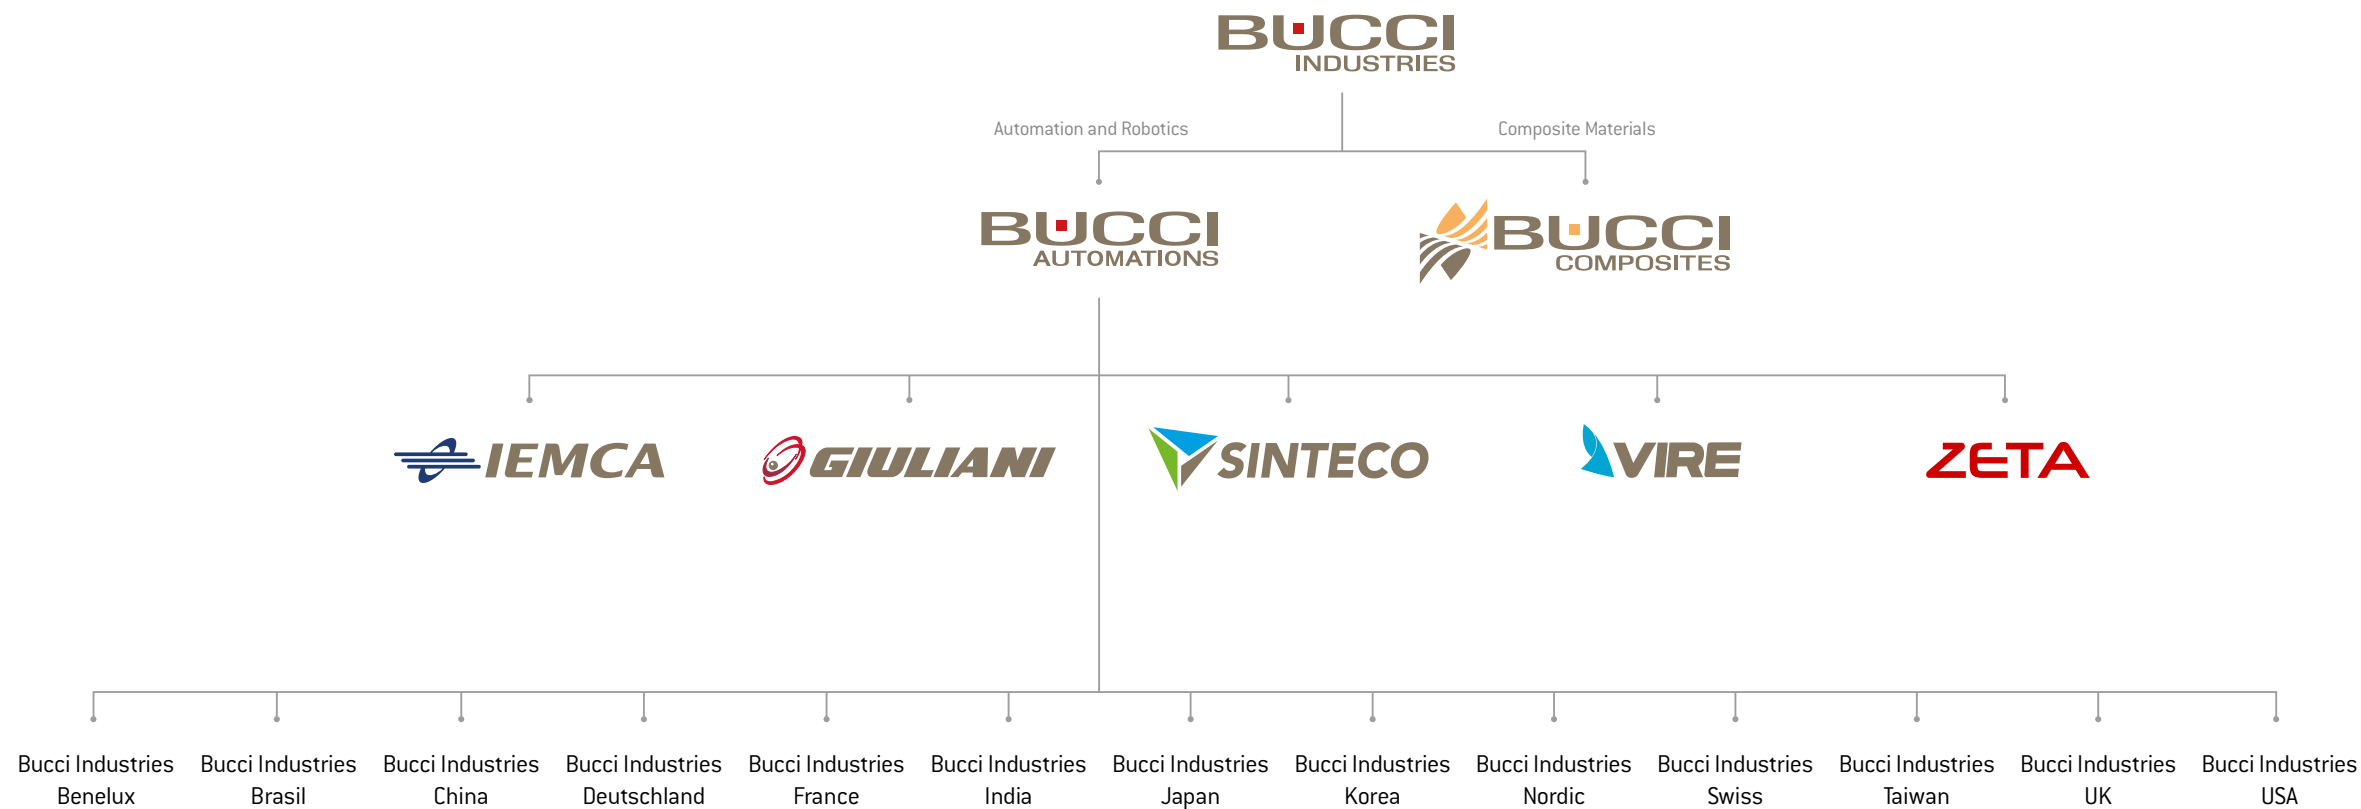

Italian holding


Italian companies

Italian companies' divisions

Worldwide subsidiary companies

2003	2005	2007	2015	2017	2018	2019	2021	2022	2023	2024
Acquisition of SINTECO	Opening of IEMCA Bi-Tech plant in China	Acquisition of VIRE	Creation of BUCCI AUTOMATIONS	Founding of Bucci Industries Swiss	Founding of Bucci Industries Benelux	Founding of Bucci Industries Nordic	Opening of an additional branch office in Lüdenscheid	Founding of Bucci Industries Korea	Founding of Bucci Industries India	Founding of Bucci Industries UK

IEMCA WORLDWIDE

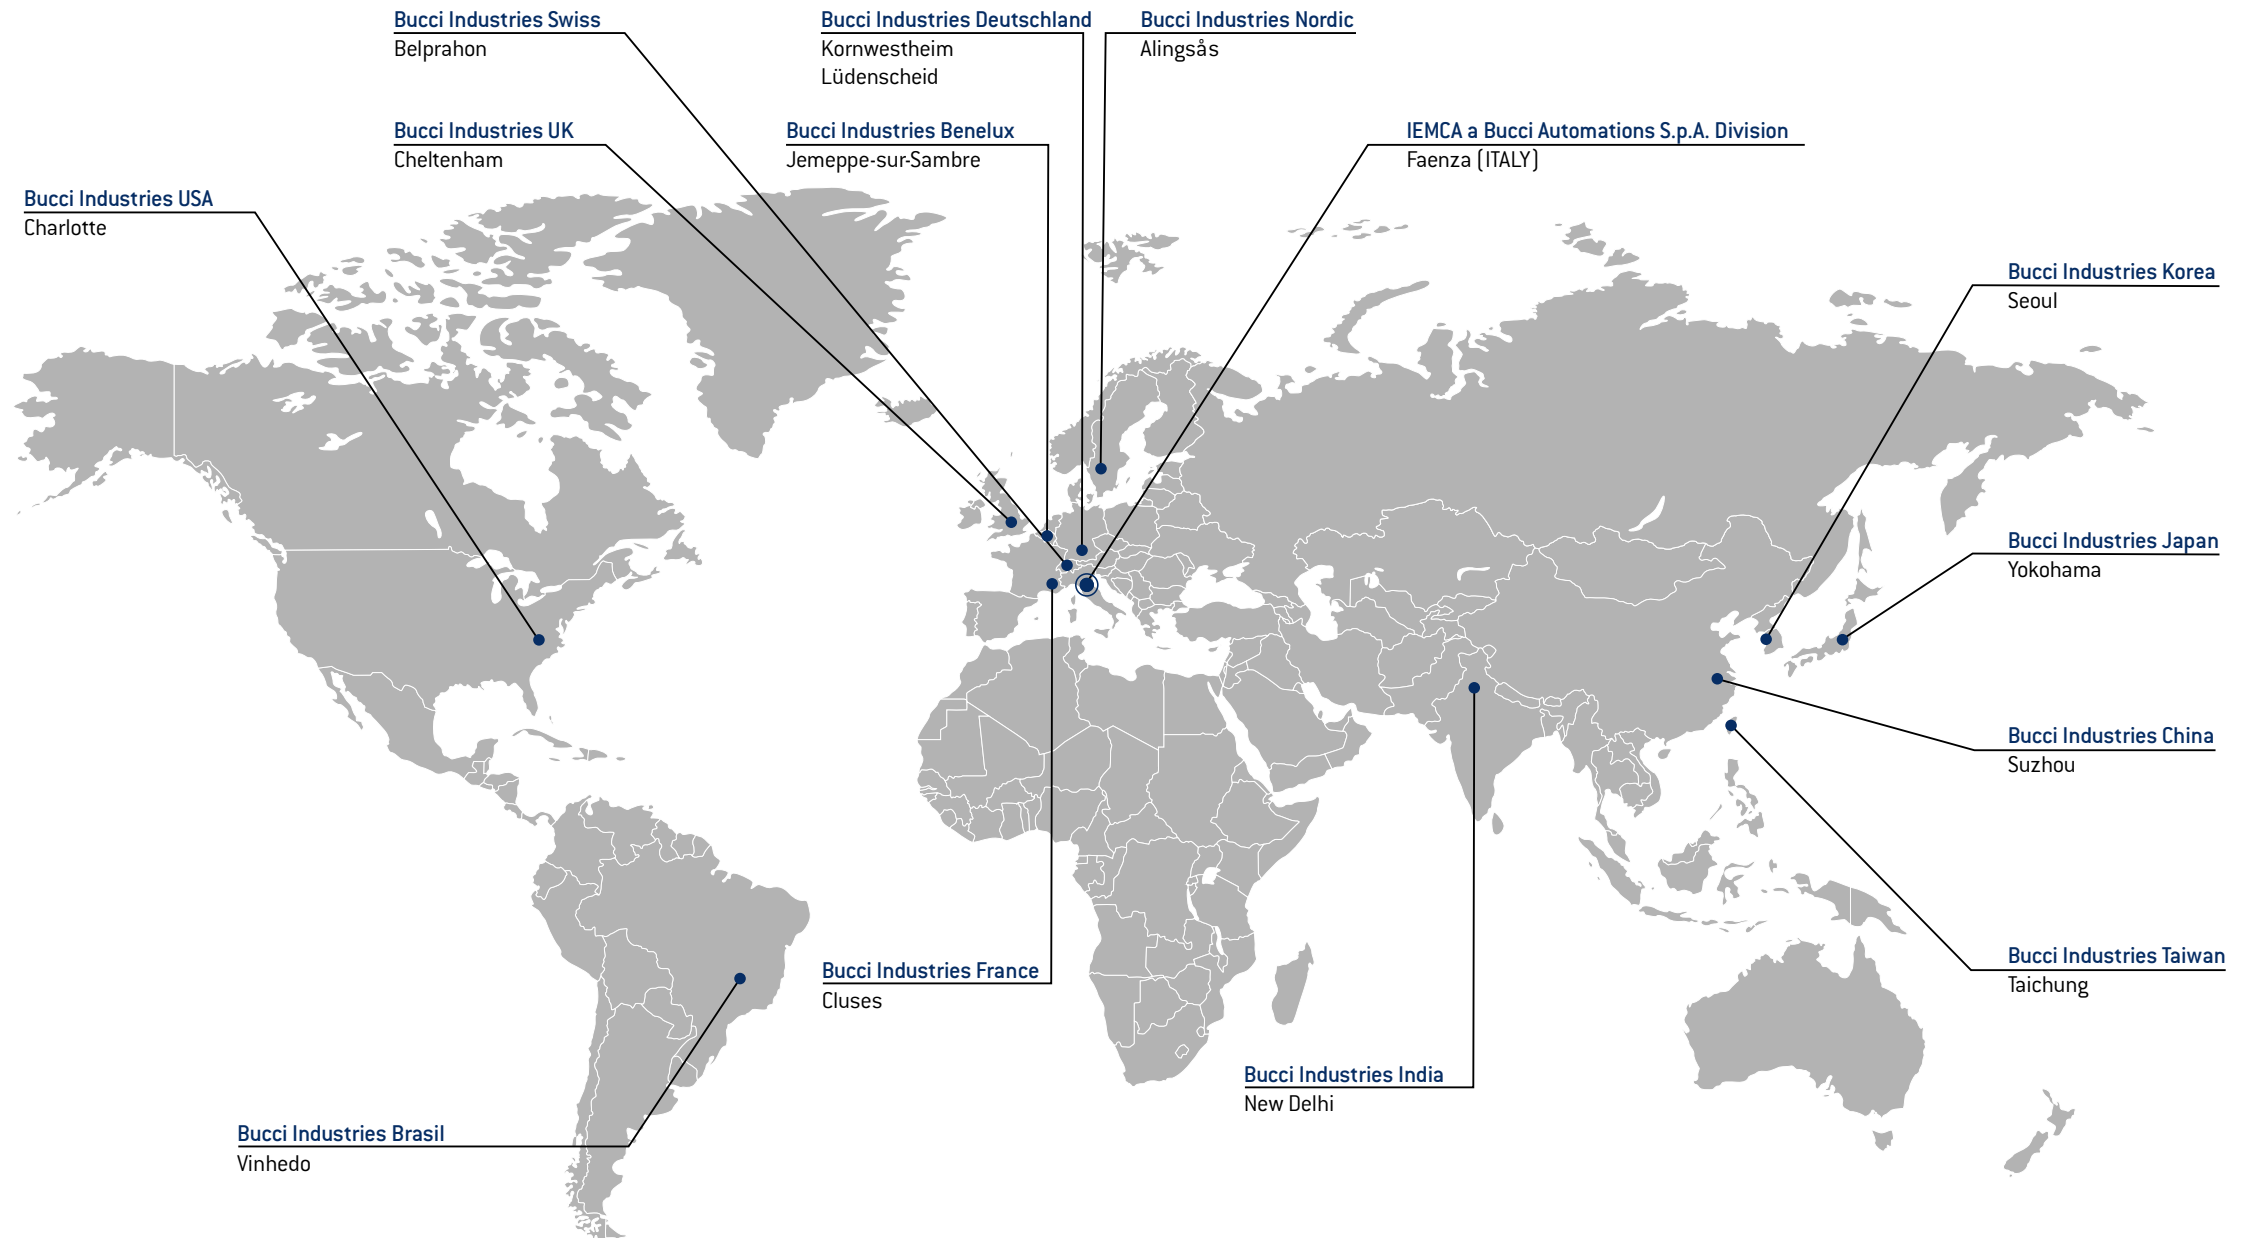

HEADQUARTERS

IEMCA
a BUCCI AUTOMATIONS S.p.A. Division
Via Granarolo 167
48018 Faenza (RA)
Italy
Ph. +39 0546 698000
iemca.it@bucci-industries.com
www.iemca.com

BRANCHES

BUCCI INDUSTRIES BENELUX S.r.l.
53/4, Route de Saussin
5190 Jemeppe-sur-Sambre
Belgium
Ph. +32 475 91 45 44
iemca.be@bucci-industries.com

BUCCI INDUSTRIES BRASIL LTDA
Rua Arnaldo Roque Brisque, 104
13285-328 Vista Alegre - Vinhedo, SP
Brazil
Ph. +55 19 3515 7220
iemca.br@bucci-industries.com

BUCCI INDUSTRIES CHINA
BI-TECH (Suzhou) Co., Ltd.
No. 106 Wufang Road, Wujiang District
Suzhou City, Jiangsu Province
PRC
Ph. +86 512 8155 6988
iemca.cn@bucci-industries.com

BUCCI INDUSTRIES DEUTSCHLAND GmbH
Stammheimer Str. 10
70806 Kornwestheim
Germany
Ph. +49 7154 83 70 70 0
iemca.de@bucci-industries.com

BUCCI INDUSTRIES DEUTSCHLAND GmbH
Königsberger Str. 10
58511 Lüdenscheid
Germany
Ph. +49 2351 80521
iemca.de@bucci-industries.com

BUCCI INDUSTRIES FRANCE SAS
145, Rue Louis Armand
Z.I. Les Grands Prés
74300 Cluses
France
Ph. +33 (0)4 50 89 69 60
iemca.fr@bucci-industries.com

BUCCI INDUSTRIES INDIA PRIVATE LTD
411, DLF Tower B, Jasola District Centre
110076 New Delhi
India
Ph. +91 11 41525077
iemca.in@bucci-industries.com

BUCCI INDUSTRIES JAPAN Co. Ltd.
6-10-1 Kamoi, Midori-Ku
226-0003 Yokohama
Japan
Ph. +81 45 931 5096
iemca.jp@bucci-industries.com

BUCCI INDUSTRIES KOREA LIMITED
#131-132, 337, Bupyeong-daero,
Bupyeong-gu, Incheon
Republic of Korea
Ph. +82 32 293 8341
iemca.kr@bucci-industries.com

BUCCI INDUSTRIES NORDIC AB
Metallgatan 2-4
441 32 Alingsås
Sweden
Ph. +46 322 66 87 20
iemca.se@bucci-industries.com

BUCCI INDUSTRIES SWISS SA
Route du Grandval 3
CH-2744 Belprahon
Switzerland
Ph. +41 (0)32 493 40 54
iemca.ch@bucci-industries.com

BUCCI INDUSTRIES TAIWAN
GIULIANI IEMCA MACHINERY CO., LTD
No. 297, Dongxing Rd., Dali Dist.,
Taichung City 412016
Taiwan
Ph. +886 4 24066970
iemca.tw@bucci-industries.com

BUCCI INDUSTRIES UK LIMITED
The Manor House, The Grange
Bishops Cleeve, Cheltenham
Gloucestershire GL52 8YQ
United Kingdom
iemca.uk@bucci-industries.com

BUCCI INDUSTRIES USA, Inc.
9332 Forsyth Park Drive
Charlotte, NC 28273
USA
Ph. +1 (704) 583 8341
iemca.us@bucci-industries.com

FOLLOW US ON



IEMCA prefers



AZIENDA CON SISTEMA
DI GESTIONE QUALITÀ
CERTIFICATO DA DNV GL
=ISO 9001=



www.iemca.com



is a brand of

